


Product Grades		22/20	25/10	25/15	35/10	35/15
<b>Physical Properties</b>						
Cell Nominal Diameter	mm	220	250	250	350	350
Cell Length (L)	mm	275	295	295	415	415
Cell Width (W)	mm	230	250	250	370	370
Cell Depth <sup>1</sup>	mm	200	100	150	100	150
Panel Length <sup>1</sup>	m	6	5	5	5	5
Panel Width <sup>1</sup>	m	3	7	7	7	7
Cells per m <sup>2</sup> (nominal)		30	26	26	12	12
Panel Weight	kg	20	17	25	11	17
<b>Mechanical/Hydraulic Properties</b>						
Cell Wall Tensile Strength <sup>2</sup>	kN/m	20.7	20.7	20.7	20.7	20.7
Cell Junction Peel Strength <sup>3</sup>	kN/m	10.0	10.0	10.0	10.0	10.0
Cell Wall Permeability <sup>4</sup>	l/m <sup>2</sup> s	45.0	45.0	45.0	45.0	45.0

1. Other sizes are available to order.
2. Results derived from Wide Width Tensile Test (EN ISO 10319).
3. Terram internal test method.
4. Results derived from a single cell wall Permeability Test (EN ISO 11058).

Results quoted are family mean values derived from testing over periods of time.

Colour Dark Grey—other colours available to order

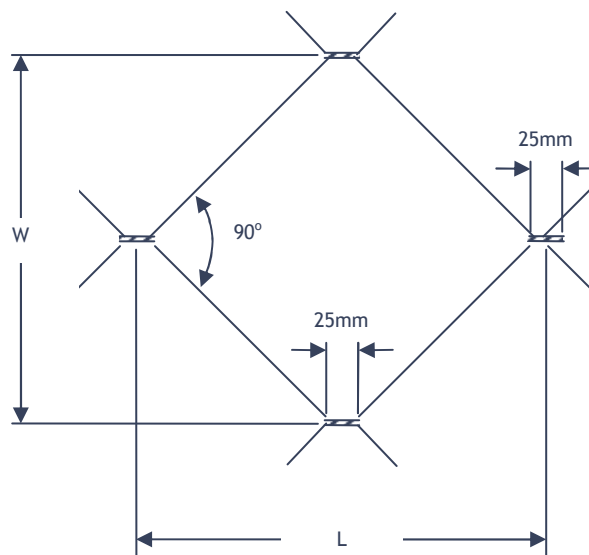

The information contained herein is, to the best of our knowledge, accurate in all material respects. However, since the circumstances and conditions in which such information and the products mentioned herein can be used may vary and are beyond our control, no representation or warranty, express or implied, of any nature whatsoever is or will be made and no responsibility or liability is or will be accepted by us, any of our affiliates or our or their respective directors, officers, employees or agents in relation to the accuracy or completeness or use of the information contained herein or any such products and any such liability is expressly disclaimed.

#### Fiberweb Geosynthetics Ltd

Blackwater Trading Estate  
The Causeway, Maldon  
Essex, CM9 4GG  
tel +44(0) 1621 874200  
fax +44(0) 1621 874299  
email info@terram.com  
www.terram.com